



# Submittal Data Sheet

Indoor Unit Model#: ACiQ-48-PAH  
Outdoor Unit Model#: ACiQ-48-HPD

## Air Handler Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR UNIT SPECIFICATIONS		
ESP (inWG)		0-1.2
Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		1601.0 / 1442.1 / 1265.5 / 1088.9 / N/A
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		N/A / 53.0 / 49.5 / 33.5 / N/A
Dimension (WxDxH)	inch	21.50 x 21.50 x 55.94
	mm	546.0 x 546.0 x 1421
Package (WxDxH)	inch	59.84 x 25.00 x 31.10
	mm	1520 x 635 x 790
Net/Gross Weight	lbs	186.51/232.14
	kg	84.6/105.3

OUTDOOR UNIT SPECIFICATIONS		
Compressor Type		ROTARY
Compressor Model		MTH550UKPC8FU
Refrigerant		R454B
Refrigerant Oil Charge (mL)		1800
Refrigerant Oil		HAF68D1C
Outdoor Air Flow (Max) (CFM)		3037.2
Outdoor Noise Level (dBA)		65
Dimension (WxDxH)	inch	38.58 x 16.34 x 38.39
	mm	980.0 x 415.0 x 975.0
Package (WxDxH)	inch	45.08 x 19.68 x 42.52
	mm	1145 x 500 x 1080
Net/Gross Weight	lbs	232.59/201.50
	kg	105.5/91.4

EFFICIENCY RATINGS			
Cooling		Heating	
SEER2	17.5	HSPF2-4	9.5
EER2	12.0	COP	3.28

COOLING PERFORMANCE	
Cooling (Btu/hr)	
Rated Capacity	48000
Min/Max Capacity	18000~52000
Moisture Removal (L/h)	4.94
Standard Operating Range (°F/°C)	-22~122 (-30~50)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB



HEATING PERFORMANCE	
Heating (Btu/hr)	
1. @ 47°F Rated	48000
1. @ 47°F Min/Max Capacity	13500~52000
2. @ 17°F Rated	34000
3. @ 5°F Rated: Capacity / COP	48000/2
3. @ 5°F Max: Capacity	48000
Standard Operating Range (°F/°C)	-22~75 (-30~24)
1. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Heating Conditions, Compressor Operating at Max. Frequency	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

\* When ACiQ-48-HPD is paired with ACiQ-48-PAH, an additional 0.65kg/22.93oz of refrigerant is required.

ELECTRICAL SPECIFICATIONS		
Indoor Power Supply		115/208/230V,60Hz,1Ph
Indoor MCA 115V/(208/230V)		14.5/10
Indoor MOP		15
Outdoor Power Supply		208/230V,60Hz,1Ph
Outdoor MCA		38
Outdoor MOP		40
Communication Wiring		AWG 20-2
Compressor RLA		28
Outdoor Fan Motor RLA		2
Outdoor Fan Motor W		250
Indoor Fan Motor RLA		8
Indoor Fan Motor W		N/A
System Power Input @ Cooling (W)		4266 (1300 ~ 4870)
System Power Input @ Heating (W)		4521 (925 ~3880)
MCA: Min. circuit amps (A)		MOCP: Max. over current protection (A)
RLA: Rated load amps (A)		W: Fan motor rated output (W)


REFRIGERANT PIPING SPECIFICATIONS		
Throttle type (Indoor)		EXV
Throttle type (Outdoor)		EXV
Liquid Size		9.52mm (3/8in)
Gas Size		19mm (3/4in)
Max. Piping Length (ft/m)		246 (75)
Max. Height Difference (ft/m)		98.4 (30)
Max. Pre-charged Length (ft/m)		24.6 (7.5)
Refrigerant Pre-charged Amount (oz/kg)*		134.04 (3.8)
Additional Charge of Refrigerant ((oz/ft)/(g/m))		0.7 (65)
Connection Method		Flared

### Indoor Unit Dimensions

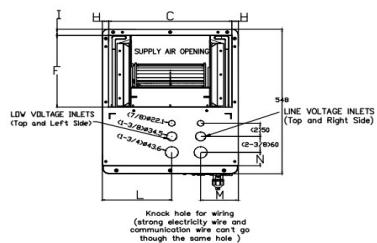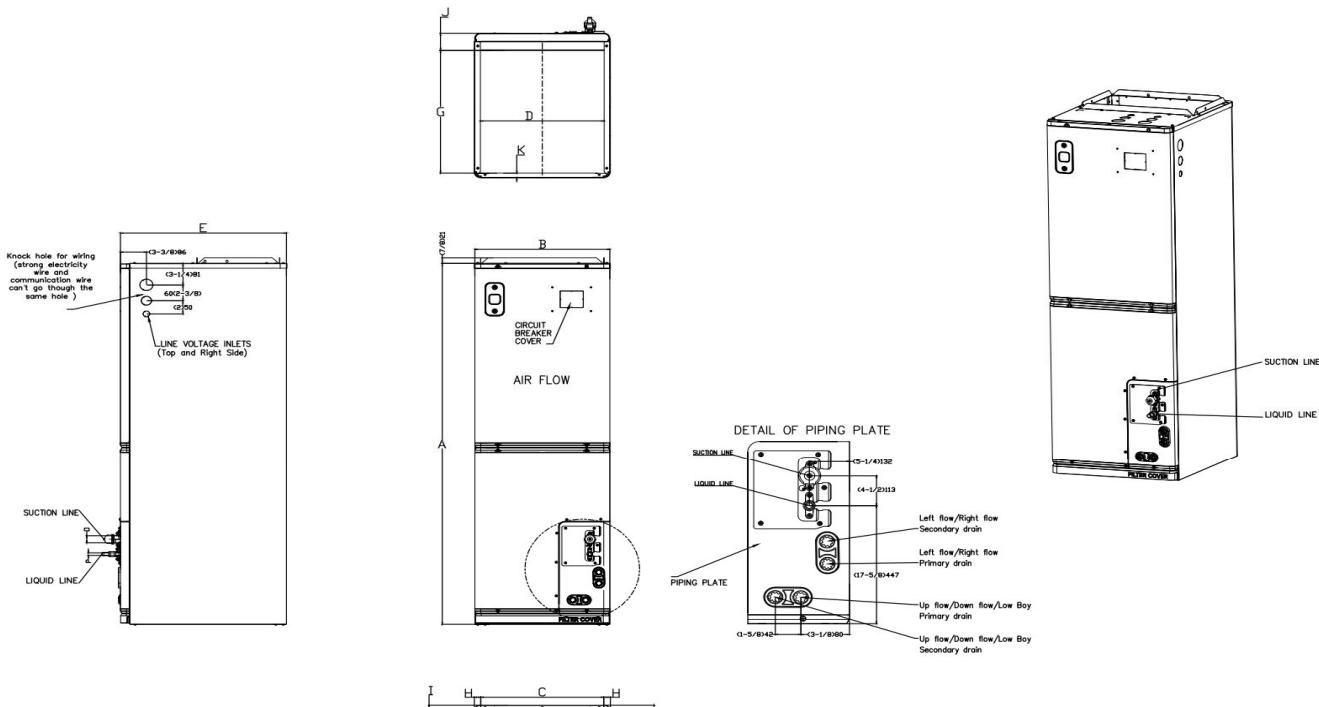


Dimensions	Model(Btu/h)	18K/24K		30K/36K		48K/54K	
		inch	mm	inch	mm	inch	mm
A	Model Height	49-3/4	1263	54	1371	56	1421
B	Model Width	14-1/2	368	17-1/2	445	21-1/2	546
C	Supply Air Opening Width	12-7/8	328	16	405	19-7/8	506
D	Return Air Opening Width	13	331	16	407	20	509
E	Model Depth	21-1/2	546	21-1/2	546	21-1/2	546
F	Supply Air Opening Depth	10-5/8	271	10-5/8	271	10-5/8	271
G	Return Air Opening Depth	18-1/4	465	18-1/4	465	18-1/4	465
H	Supply Air Opening Clearance	7/8	22	7/8	22	7/8	22
I	Supply Air Opening Clearance	1	24	1	24	1	24
J	Return Air Opening Front Clearance	2-1/2	65	2-1/2	65	2-1/2	65
K	Return Air Opening Back Clearance	3/4	18	3/4	18	3/4	18
L	Top cover knock hole	/	/	9	229	10-7/8	275
M	Top cover knock hole	4-1/2	113	4-7/8	124	5-1/8	131
N	Top cover knock hole	2	51	2	51	1-5/8	41
O	Refrigerant piping flareconnection(gas)	3/4	19	3/4	19	3/4	19
P	Refrigerant piping flareconnection(liquid)	3/8	9	3/8	9	3/8	9

## Outdoor Unit Dimensions

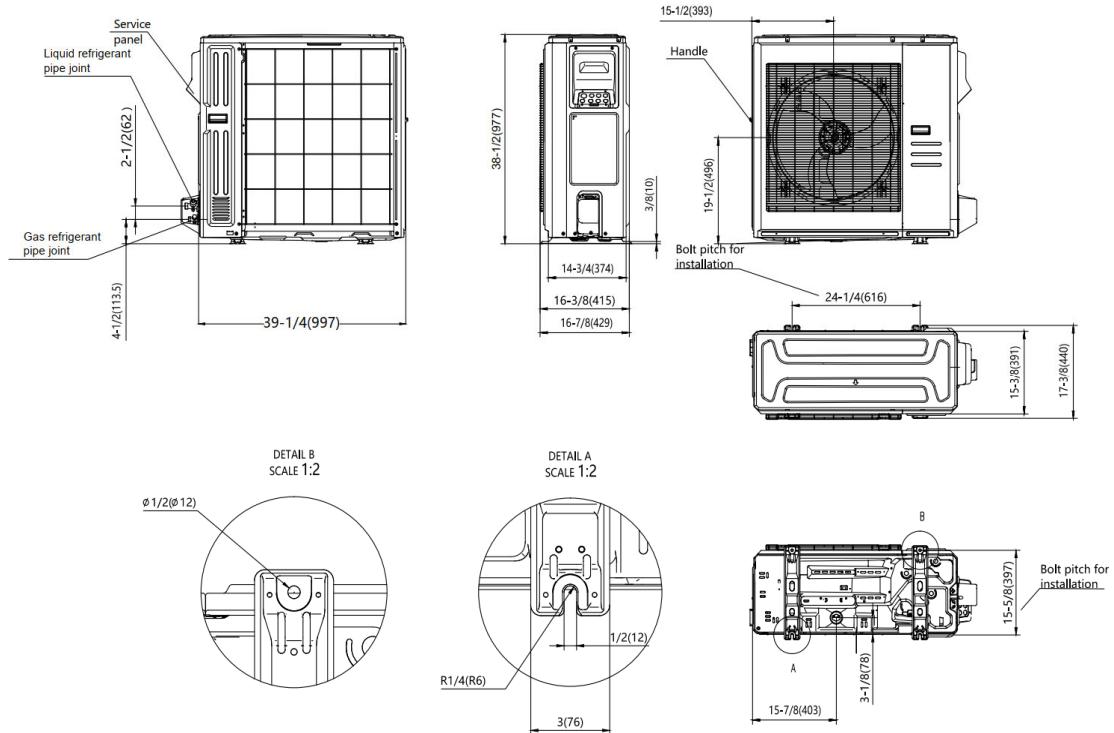


## Installation Instruction For Outdoor Unit

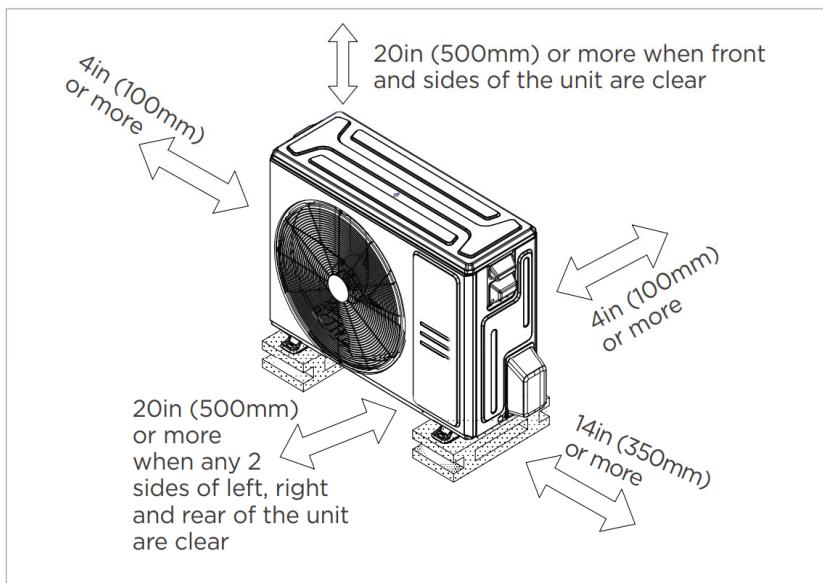

Meets all spatial requirements shown in Installation Clearance Requirements above.

#### Fan Performance For Indoor Unit

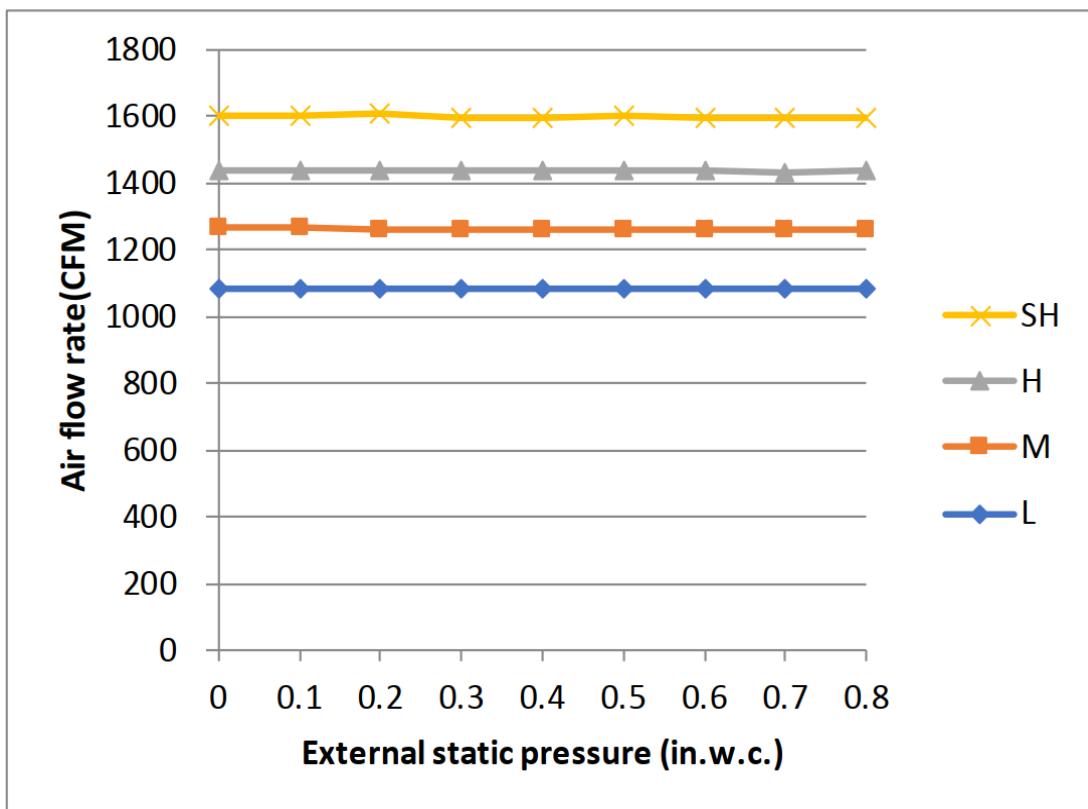

#### Features

- Multi-position installation: horizontal (left or right), vertical (up or down)
- 115/230V voltage compatible for IDU
- Aluminum Coil
- Constantly Air Flow system up to 1.0 In.W.G
- Optional Auxiliary heat kit up to 25kW
- Easy Maintenance
- Multiple control options available:
  - Two way communication wired controller: 120N (X6)
  - Two way communication wired controller with built-in WiFi: 120N (X6W)
  - Wireless remote controller
  - Third-Party 24V Thermostat
- Adaptive Control System
- High efficiency up to 19 SEER2, 12.5 EER2, 10.8 HSPF2
- 100% heat output at -13F\*
- Chassis heater and crankcase heater equipped as standard

\* For ACiQ-36-PAH pairing with ACiQ-36-HPD, rated cooling capacity/heating capacity at -13F=100%