

## MODEL AEPD140-3 Two Speed Fan

### DESCRIPTION

- Low sone two speed ceiling mounted fan that's designed to operate continuously and quietly.
- It is ENERGY STAR approved and HVI certified.
- It is also ETL and cETL certified to comply with ASHRAE 62.2 whole house fan to meet the minimum ventilation required by local building codes.



### FEATURES

- TWO SPEED EC motor fan with low energy consumption.
- Constant airflow suitable to static pressure up to 0.4sp.
- LOW SPEED adjustable speed controller allows accurate cfm selection (0, 30 - Max CFM).
- TIME DELAY preset allows the fan to continue running for an additional 5 to 60 minutes.
- CFM select setting for high speed (80CFM-110CFM-140CFM)
- Built in humidity sensor available for auto operation. Motion sensor plug and play setting.
- QUIET operates at lower rpm to ensure low sone levels
- Power rating 120 volts and 60 Hz.

### HOUSING

- Made of rugged 26 gauge galvanized steel.
- Detachable 6 inch collar which include a light built in back draft damper.
- Heavy duty 4 point mounting bracket adjustable up to 24 inch centres.

### GRILLE




- Made of a rugged polymeric resin that's known for it's durability.
- Premium grille offers low profile with elegance and simplicity.
- Comes with torsion spring clips for easy installation.

**MODEL AEPD140-3 Two Speed fan**

Model Number	<b>AEPD140-3 Two Speed fan</b>					
Static Pressure in inches w.g.	0.1	0.25	0.1	0.25	0.1	0.25
Air Volume (CFM)	80	80	110	110	140	140
Noise (sones)	<0.3	N/A	<0.3	N/A	0.4	N/A
Fan watts	5.6W		8.5W		13W	
Duct Diameter			6"			
Power Rating (V/Hz)			120/60			

HVI Certified performance based on HVI Procedures 915, 916, and 920.

Other airflow reference performance based on HVI Procedures 915, 916, and 920.

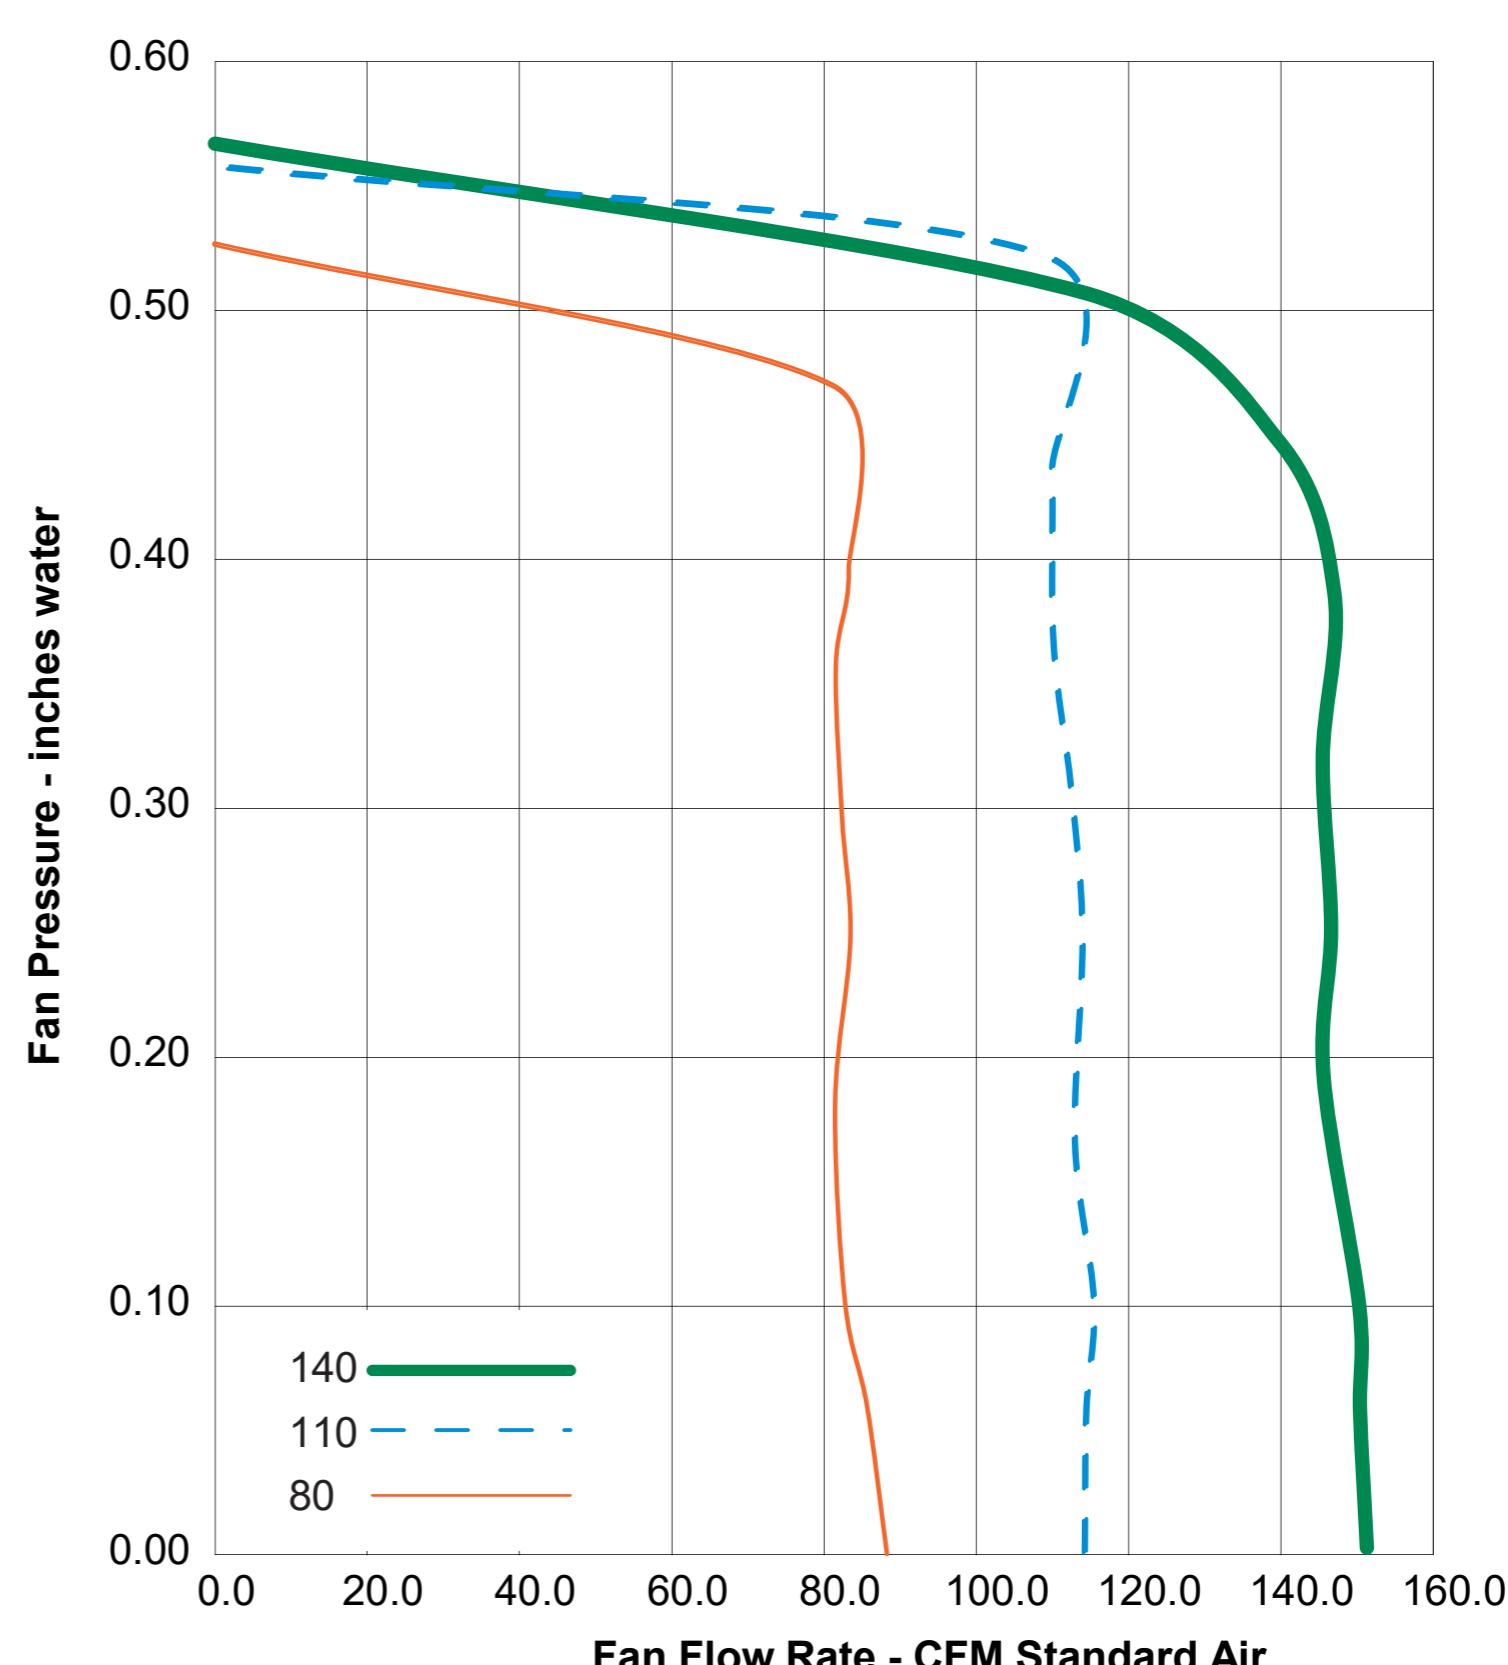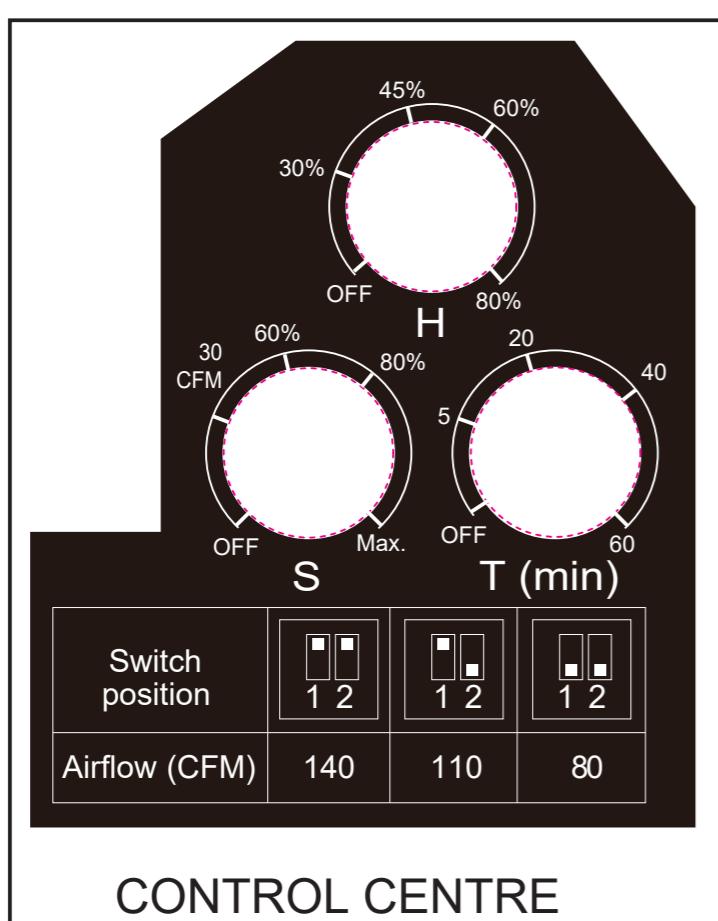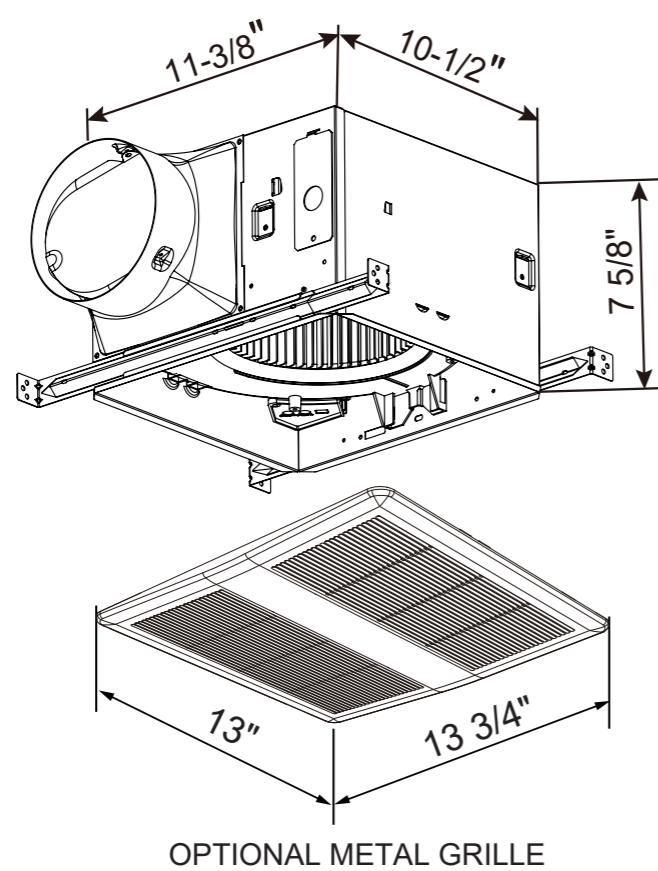

Reference	QTY.	Remarks	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date:

**CERTIFICATIONS**
