



**SUBMITTAL DATA SHEET**

<b>Duct Heat Pump System</b>		<b>ACIQ-36CD-HH-MB</b>
Location: _____ Engineer: _____ Submitted to: _____ Submitted by: _____ Reference: _____	Approval: _____ Date: _____ Construction: _____ Unit #: _____ Drawing #: _____	

<b>Set Code</b>	22023010005884
Indoor unit code	22023011003415
Outdoor unit code	22022516001923
<b>Set Model</b>	
Indoor unit model	ACIQ-36CD-HH-MB
Outdoor unit model	
<b>Certified</b>	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">             AHRI         </div> <div style="text-align: center;">             ENERGY STAR         </div> </div> <div style="display: flex; justify-content: space-around; align-items: center; margin-top: 5px;"> <div style="text-align: center;">             CSA         </div> <div style="text-align: center;">             SP US         </div> </div>




SYSTEM PERFORMANCE DATA			
<b>Power supply</b>			
Normal Operational Voltage	(V, Ph, Hz)	208/230V, 1Ph,	60Hz
Voltage Range	(V)		187-253
<b>Electrical</b>			
Minimum circuit ampacity(Outdoor)	(A)		41.0
Max.fuse(Outdoor)	(A)		50.0
Connection wiring		14AWG*2	Stranded, shielded
<b>Cooling</b>			
Capacity	(Btu/h)	36000(9770-41600)	
Power Input	(W)	3950(480-4130)	
Current	(A)	17.5(3.73-17.9)	
SEER2	(Btu/W)		16.5
EER2	(Btu/W)		9.0
<b>Heating</b>			
Capacity	(Btu/h)	42000(12700-52000)	
Power Input	(W)	3700(670-4755)	
Current	(A)	16.9(4.97-21.03)	
HSPF2.4	(Btu/W)		11.0
HSPF2.5	(Btu/W)		8.8
COP	W/W		3.33
Heat at 17F(H32)	(Btu/h)		34000
Heat at 5F(H42)	(Btu/h)		36000
COP at 5F(H42)	W/W		1.98

REFRIGERANT PIPE DATA			
Throttle type	Indoor unit		N/A
	Outdoor unit		EXV+Throttle valve
Design pressure	(PSIG)		550/340
Refrigerant Type			R410A
Refrigerant charge	oz		148.40
Refrigerant precharge	(ft)		25.0
	(m)		7.5
Additional charge for each ft	(oz/ft)		0.32
Additional charge for each m	(g/m)		30.0
Liquid side/ Gas side(indoor)	(inch)		3/8"/5/8"
	(mm)		9.52/15.9
Liquid side/ Gas side(outdoor)	(inch)		3/8"/5/8"
	(mm)		9.52/15.9
Max. pipe length	(ft)		213.3
	(m)		65.0
Max. difference in level	(ft)		98.4
	(m)		30.0
Connection method			Flared
Indoor(cooling)	(Deg. °F)		62~90
	(Deg. °C)		17~32
Indoor(heating)	(Deg. °F)		32~86
	(Deg. °C)		0~30
Outdoor(cooling)	(Deg. °F)		5~122
	(Deg. °C)		-15~50
Outdoor(heating)	(Deg. °F)		-22~75
	(Deg. °C)		-30~24

INDOOR UNIT DATA			
<b>Indoor fan motor</b>			
Model			ZKFN-300-8-1
Qty			1
Input	(W)		250.00
Output	(W)		300.0
RLA	(A)		1.6
Speed(Hi/Mi/Lo)	(r/min)		1130/1050/990
<b>Air flow &amp; Noise level</b>			
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)		//1081.76/912.35/702.94
Indoor noise level (Hi/Med/Lo)	[dB(A)]		49.5/46.5/43.0
Dehumidification	(L/H)		2.85
<b>Indoor unit</b>			
Dimension (WxDxH)	(inch)		53.54x30.47x9.80
	(mm)		1360x774x249
Packing(WxDxH)	(inch)		61.81x31.69x12.99
	(mm)		1570x805x330
Net/Gross weight	(lbs.)		110.89/128.09
	(kg)		50.3/58.1

OUTDOOR UNIT DATA			
<b>Compressor</b>			
Type			ROTARY
Model			EAPQ420D1UMUA
Brand			GMCC
Capacity	(Btu/h)		44015
Input	(W)		3565
Rated current (RLA)	(A)		32
Refrigerant oil/oil charge	(ml)		1460±15mlESTER OIL VG74
<b>Outdoor fan motor</b>			
Model			ZKFN-85-8-22-5
Qty			2
Input	(W)		126.0
Output	(W)		85
RLA	(A)		1.2
Speed	(r/min)		800/750/650
<b>Air flow &amp; Noise level</b>			
Outdoor air flow (Max.)	(CFM)		4500
Outdoor noise level	[dB(A)]		65.0
<b>Outdoor unit</b>			
Dimension (WxDxH)	(inch)		37.48x16.34x52.48
	(mm)		952x415x1333
Packing (WxDxH)	(inch)		43.11x19.49x58.27
	(mm)		1095x495x1480
Net/ Gross weight	(lbs.)		220.24/248.02
	(kg)		99.9/112.5

**Indoor unit dimension(internal pump)**

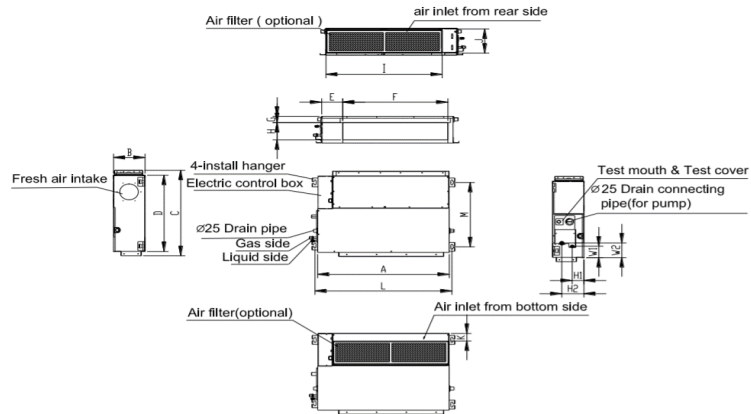

Model (KBTu/h)	unit	A	B	C	D	E	F	G	H	I	J	K	L	M	H1	H2	W1	W2
9/12	mm	700	200	506	450	137	537	30	152	599	186	50	741	360	84	140	84	84
	inch	27.6	7.9	19.9	17.7	5.4	21.1	1.2	6.0	23.6	7.3	2.0	29.2	14.2	3.3	5.5	3.3	3.3
18	mm	880	210	674	600	140	706	50	136	782	190	40	920	508	78	148	88	112
	inch	34.6	8.3	26.5	23.6	5.5	27.8	2.0	5.4	30.8	7.5	1.6	36.2	20.0	3.1	5.8	3.5	4.4
24	mm	1100	249	774	700	140	926	50	175	1001	228	5	1140	598	80	150	130	155
	inch	43.3	9.8	30.5	27.6	5.5	36.5	2.0	6.9	39.4	9.0	0.2	44.9	23.5	3.1	5.9	5.1	6.1
36	mm	1360	249	774	700	140	1186	50	175	1261	228	5	1400	598	80	150	130	155
	inch	53.5	9.8	30.5	27.6	5.5	46.7	2.0	6.9	49.6	9.0	0.2	55.1	23.5	3.1	5.9	5.1	6.1
48	mm	1200	300	874	800	123	1044	50	227	1101	280	5	1240	697	80	150	185	210
	inch	47.2	11.8	34.4	31.5	4.8	41.1	2.0	8.9	43.3	11.0	0.2	48.8	27.4	3.1	5.9	7.3	8.3

**Outdoor unit dimension**

