



Submittal Data Sheet

Indoor Unit Model#: ACIQ-18W-HH-MD
Outdoor Unit Model#: ACIQ-18ZPL-HP230C

Platinum Single Zone Heat Pump with Wall Mounted Air Handler

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

System Product Code: 810175551708
Indoor Unit Product Code: 810175551388
Outdoor Unit Product Code: 810175550961



EFFICIENCY RATINGS

Cooling		Heating	
SEER2	21.4	HSPF2-4	11.0
EER2	12.5	COP	3.26

COOLING PERFORMANCE

Cooling (Btu/hr)	
Rated Capacity	18000
Min/Max Capacity	8800~19400
Moisture Removal (L/h)	9.1
Standard Operating Range (°F/°C)	-22~122 (-30~50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

HEATING PERFORMANCE

Heating (Btu/hr)	
1. @ 47°F Rated	18000
1. @ 47°F Min/Max Capacity	11200~19500
2. @ 17°F Rated	15000
3. @ 5°F Rated: Capacity / COP	18000 / 1.92
3. @ 5°F Max: Capacity	18000
Standard Operating Range (°F/°C)	-22~75 (-30~24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

INDOOR UNIT SPECIFICATIONS

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)	635.7 / 500.3 / 359.0 / 294.3 / NA	
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)	49.5 / 45.0 / 38.0 / 31.5 / 19.5	
Dimension (W×D×H)	inch	40.06 x 9.72 x 12.60
	mm	1017.4 x 248 x 319
Package (W×D×H)	inch	43.11 x 12.80 x 15.75
	mm	1095 x 325 x 400
Net/Gross Weight	lbs	27.34 / 36.60
	kg	12.4 / 16.6

OUTDOOR UNIT SPECIFICATIONS

Compressor Type	ROTARY	
Compressor Model	KTM240D46UKT2	
Refrigerant	R454B	
Refrigerant Oil Charge (mL)	620	
Refrigerant Oil	VG74	
Outdoor Air Flow (Max) (CFM)	1764.7	
Outdoor Noise Level (dBA)	59.0	
Dimension (W×D×H)	inch	35.04 x 13.46 x 26.50
	mm	890.0 x 342.0 x 673.0
Package (W×D×H)	inch	39.17 x 15.67 x 29.13
	mm	995 x 398 x 740
Net/Gross Weight	lbs	99.87 / 107.80
	kg	45.3 / 48.9


ELECTRICAL SPECIFICATIONS

Power Supply	208/230V, 60Hz, 1Ph	
System MCA	19.0	
Connection Wiring	14#x4	
System MOP	20	
Compressor RLA	11.7	
Outdoor Fan Motor RLA	0.9	
Outdoor Fan Motor W	80	
Indoor Fan Motor RLA	0.8	
Indoor Fan Motor W	30	
System Power Input @ Cooling (W)	1440 (230 ~ 1680)	
System Power Input @ Heating (W)	1618 (770 ~ 2050)	
MCA: Min. circuit amps (A)	MOP: Max. overcurrent protection (A)	
RLA: Rated load amps (A)	W: Fan motor rated output (W)	

REFRIGERANT PIPING SPECIFICATIONS


Throttle type (Indoor)	N/A	
Throttle type (Outdoor)	EXV+Throttle valve	
Liquid Size	6.35mm (1/4in)	
Gas Size	12.7mm (1/2in)	
Max. Piping Length (ft/m)	98.40 (30)	
Max. Height Difference (ft/m)	65.60 (20)	
Max. Pre-charged Length (ft/m)	24.6 (7.5)	
Refrigerant Pre-charged Amount (oz/g)	55.38 (1.57)	
Additional Charge of Refrigerant ((oz/ft)/(g/m))	0.16 (15)	
Connection Method	Flared	

Indoor Unit Dimensions

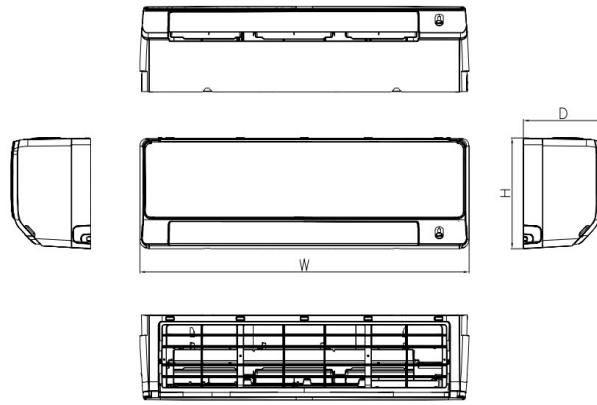


Capacity	Body Code	Unit	W	D	H
6k~12k	B	mm	848	233	300
		inch	33-3/8	9-1/8	11-3/4
18k~24k	C	mm	1017	248	319
		inch	40	9-3/4	12-1/2
24k~36k	D	mm	1190	285	371
		inch	46-7/8	11-1/4	14-5/8

Indoor Unit Installation Instructions

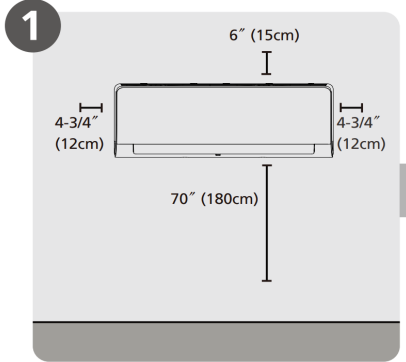


Select Installation Location

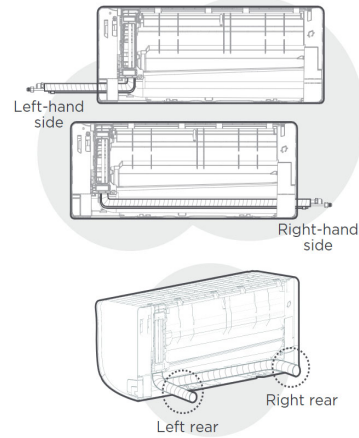

NOTE:


Based on the position of the wall hole relative to the mounting plate, choose the side from which the piping will exit the unit. You have four options for the exit direction of the piping.

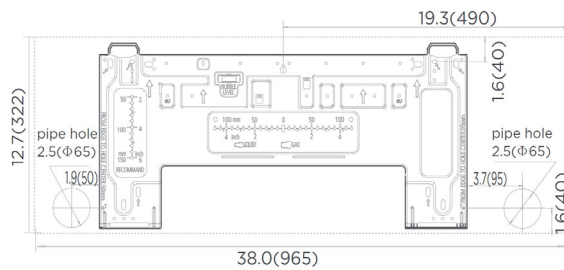


NOTE:

When the gas side connective pipe is Φ (5/8in)16mm or more, the wall hole should be (3-1/2in)90mm.

Outdoor Unit Dimensions

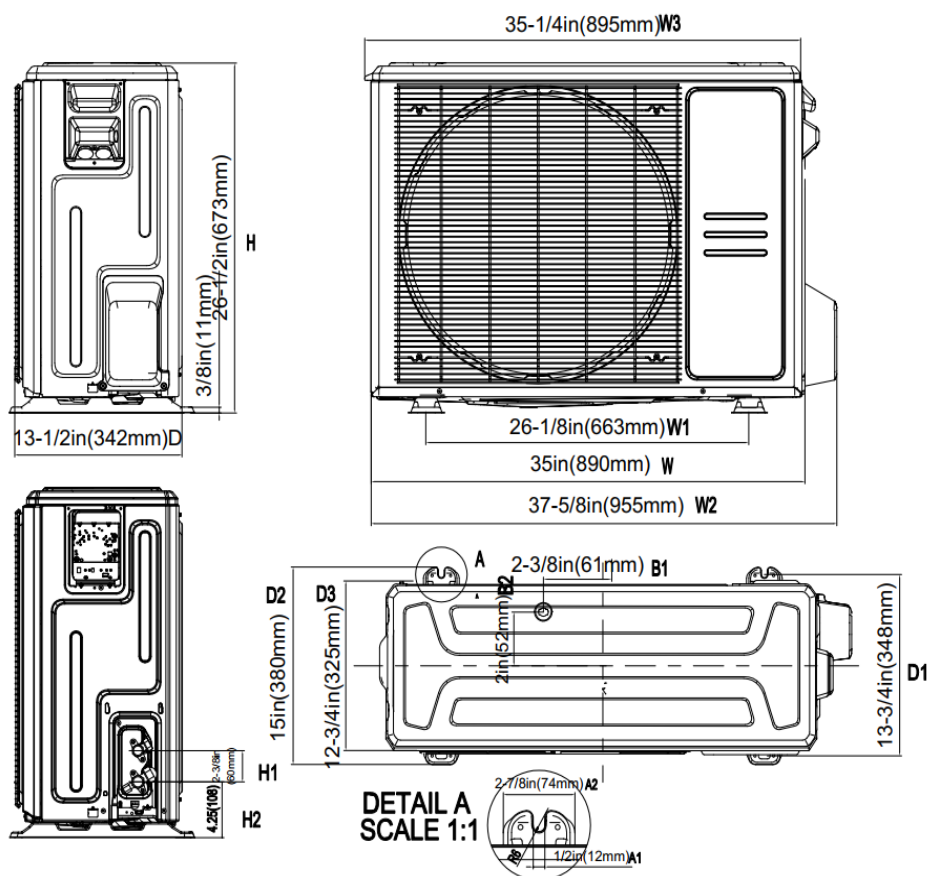

Outdoor Unit Installation Instructions

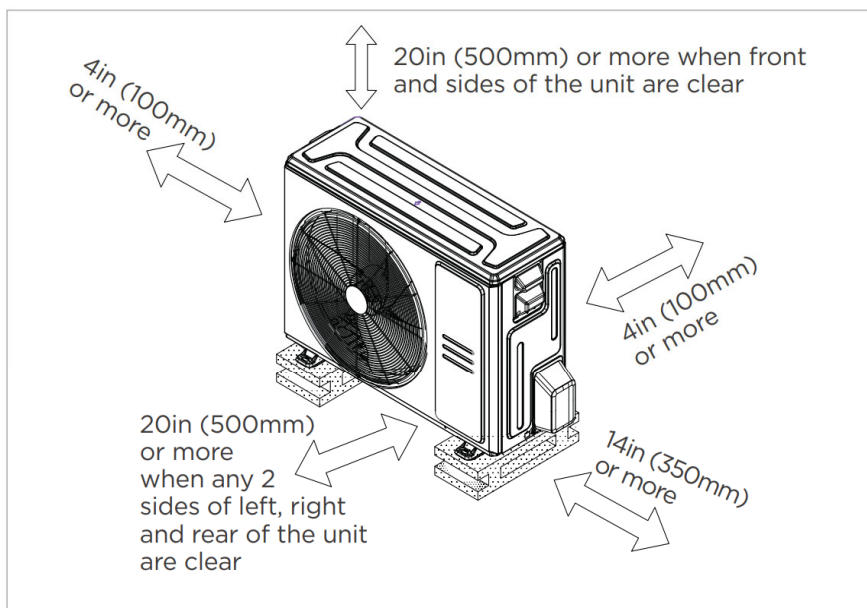

✓ Meets all spatial requirements shown in Installation Clearance Requirements above.

Features

- Intelligent eye
- Easy maintenance design
- Indoor unit TU1 copper coil
- Humidity control
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA (by using WiFi dongle)
- Multiple control options available:
 - Two way communication wired controller: 120N (X6)
 - Two way communication wired controller with built-in WiFi: 120N (X6W)
 - Infrared wired controller: 120L
 - Wireless remote controller
 - Third-Party 24V Thermostat*

*24V interface is required.