



Submittal Data Sheet

ACiQ Model#s: ACiQ-ST-WH-ADA (ADA White Toilet & White LED Display Color)
ACiQ-ST-WB-ADA (ADA White Toilet w/Black Rear Lid & Black LED Display Color)

ADA (Americans with Disabilities Act) Compliant Smart Toilet

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

Product Code: 810175553955 (ACiQ-ST-WH-ADA)
810175553962 (ACiQ-ST-WB-ADA)



TOILET DIMENSIONS & WEIGHT

Dimension (WxDxH)	inch	26.4 x 15.3 x 20.9
	mm	670 x 390 x 530
Net/Gross Weight	lbs	97.00 / 105.00
	kg	44.00 / 47.63

WATER SUPPLY REQUIREMENTS

Required Water Supply Pressure	min.	21.8 psi (0.15 MPa) (dynamic)
	max.	108.75 psi (0.75 MPa) (static)
Water Supply Temperature		35.6°F ~ 104°F (2°C ~ 40°C)
Operational Ambient Temp. Range		35.6°F ~ 104°F (2°C ~ 40°C)

ELECTRICAL SPECIFICATIONS

Power Supply	AC110~120V; 50/60Hz
Maximum Power Consumption	1120W
Power Cord Length ft. (m)	2.45 ft (0.75 m)
Water Heater Type	Instantaneous
Water Proof Level	IPX4

BIDET SPECIFICATIONS

Spray Volume	Rear Spray	Approx. 0.11 - 0.147 gal/min (0.40 - 0.65 L/min)
	Front Spray	
	User Setting	
Water Temperature Range (Adjustable)		89°F ~ 104°F (32°C ~ 40°C)
Heater Capacity		1400W
Safety Protection Devices		Temperature Fuse & Water Temperature Sensor
Backflow Prevention Device		Water Level Sensor

WARM AIR DRYER SPECIFICATIONS

Warm Air Temperature Range (Adjustable)	Room Temperature to 140°F (60°C)
Airflow Speed ft/min (m/sec)	Approx. 15.75 ft/min (4.8 m/sec)
Heater Capacity	200W ± 5%
Safety Protection Device	Temperature Fuse

HEATED SEAT SPECIFICATIONS

Surface Temperature Range (Adjustable)	89°F ~ 104°F (32°C ~ 40°C)
Heater Capacity	40W ± 7%
Safety Protection Device	Temperature Fuse

FEATURES


- Bidet Function (with adjustable water temp., water spray volume, & nozzle position)
- Warm Air Dryer Function (with adjustable dryer air temp.)
- Heated Seat Function (with adjustable surface temp.)
- Lid can be Opened/Closed automatically, with a foot sensor or by remote control
- Massage Function
- Self-Cleaning Nozzle
- Night Light
- Power outage flushing
- Electrical Leakage Protection
- Compliant with ADA dimension/height requirements

Toilet Dimensions Diagram

Dimensions:

670 mm x 390 mm x 530 mm
(26-3/8" x 15-11/32" x 20-7/8")

DIMENSIONAL DRAWING

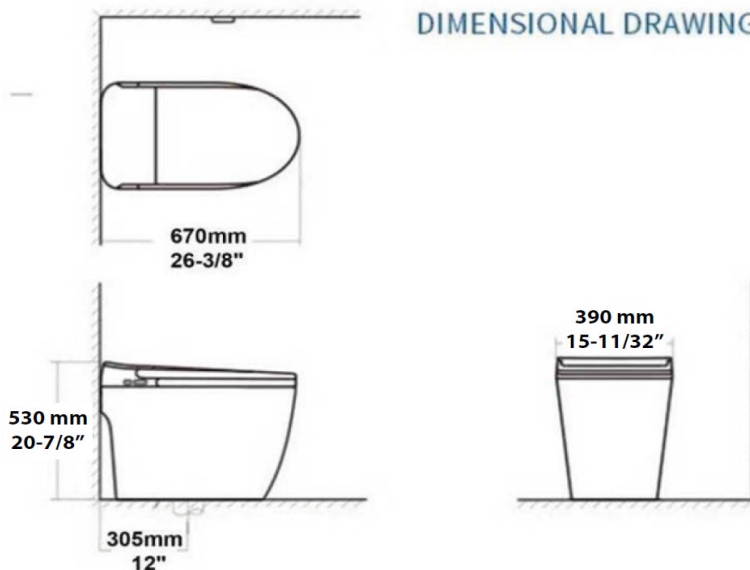

NOTES:


- This toilet is designed to rough-in at a minimum of 12" (305 mm) from a finished wall to C/L of outlet.
- Supply is not included with the toilet/fixture and must be ordered separately. Dimensions shown for supply location is suggested.
- IMPORTANT: Dimensions of toilet/fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. The manufacturer assumes no responsibility for the use fo superseded or voided pages.

NOTE: Illustrations are for reference only, actual appearance of product may vary.

System Parts Diagram



Remote Controller

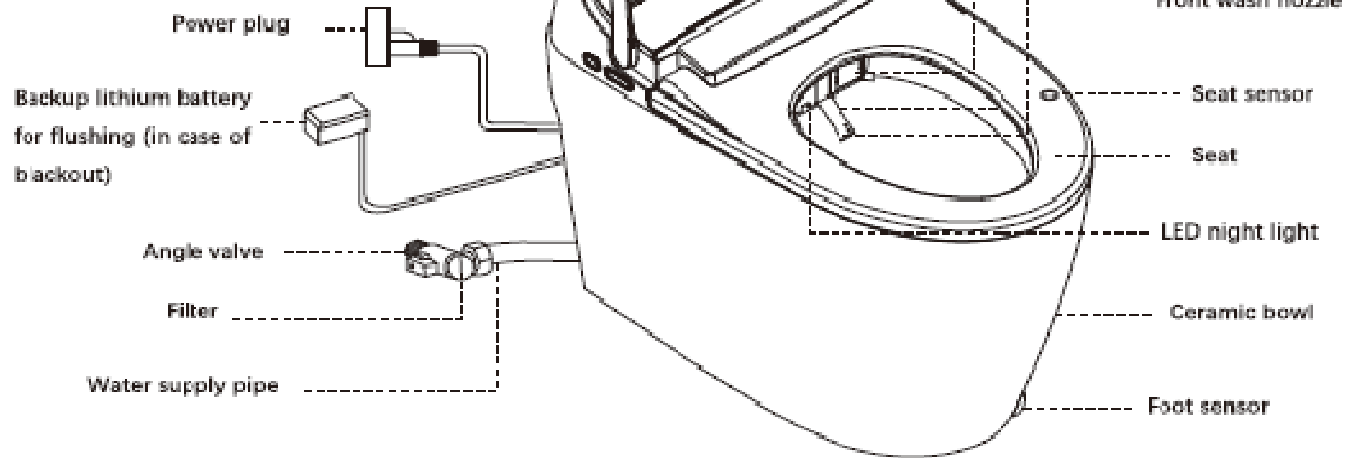

NOTE: Illustrations are for reference only, actual appearance of product may vary.