



# Submittal Data Sheet

Indoor Unit Model#: AC-I-3036ACL-17

Outdoor Unit Model#: AC-I-36AC14

## R32 36K 17.5" EVAPORATOR A-COIL & 36K TOP-DISCHARGE AC-COOLING ONLY CONDENSER

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

System UPC Product Code: 810175554198

A-Coil UPC Product Code: 810175554044

Outdoor Unit UPC Product Code: 810175554112



### OUTDOOR UNIT SPECIFICATIONS

Compressor Type	Rotary	
Compressor Model	KSG280N1VMT	
Compressor Capacity (W)	10530	
Compressor Input (W)	2415	
Compressor Rated Current RLA (A)	11.8	
Refrigerant Oil Type	Ester Oil VG75	
Refrigerant Oil Charge (mL)	850	
Outdoor Noise Level (dBA)	59	
Outdoor Airflow (CFM)	2650	
Outdoor Fan Motor Qty.	1	
Outdoor Fan Motor Input (W)	200	
Outdoor Fan Motor RLA (A)	0.92	
Dimension (WxDxH)	inch	29.13 x 29.13 x 25.00
	mm	740 x 740 x 635
Package (WxDxH)	inch	30.32 x 30.32 x 26.18
	mm	770 x 770 x 665
Net/Gross Weight	lbs	145.0 / 154.0
	kg	65.9 / 70.0
RLA: Rated Load Amps	<b>W: Watts</b>	

### EFFICIENCY RATINGS

Cooling	
SEER2	14.30
EER2	11.70

### COOLING PERFORMANCE & OPERATING TEMPERATURE

Cooling (Btu/hr)		
Rated Capacity	35000	
System Power Input (W)	3000	
Rated Current (A)	13.80	
Ambient Temperature Range (Cooling Operation)		
Indoor Unit	°F	60°F ~ 90°F
	°C	16°C ~ 32°C
Outdoor Unit	°F	5°F ~ 131°F
	°C	-15°C ~ 55°C

### ELECTRICAL SPECIFICATIONS

Indoor Power Supply	220-230V, 1Ph, 60Hz	
Outdoor Power Supply	208/230V, 1 Ph, 60Hz	
Voltage Range (V)	187 ~ 253	
Outdoor MCA (A)	24	
Outdoor MOP (A)	30	
MCA: Min. circuit amps (A)	MOP: Max. overcurrent protection (A)	


### EVAPORATOR A-COIL SPECIFICATIONS

Dimension (WxDxH)	inch	17.52 x 21.02 x 23.58
	mm	445 x 534 x 599
Package (WxDxH)	inch	21.26 x 27.36 x 25.98
	mm	540 x 695 x 660
Net/Gross Weight	lbs	59.5 / 68.0
	kg	27.0 / 30.9

### REFRIGERANT & PIPING SPECIFICATIONS



Throttle type (Indoor)	TXV for Cooling	
Refrigerant Type	R32	
Refrigerant Charge	oz	79.37
	kg	2.25
Additional Charge of Refrigerant	oz/ft	0.52
	g/m	48.0
Liquid Side	in	3/8"
	mm	9.53
Gas Side	in	3/4"
	mm	19.05
Max. Piping Length	ft	131
	m	40
Max. Height Difference	ft	82
	m	25
Drainage Water Pipe Diameter (O.D.)	in	3/4"
	mm	19.05 mm
Connection Method	Indoor Unit	Braze
	Outdoor Unit	Flare to Braze

### EVAPORATOR A-COIL DIMENSIONS

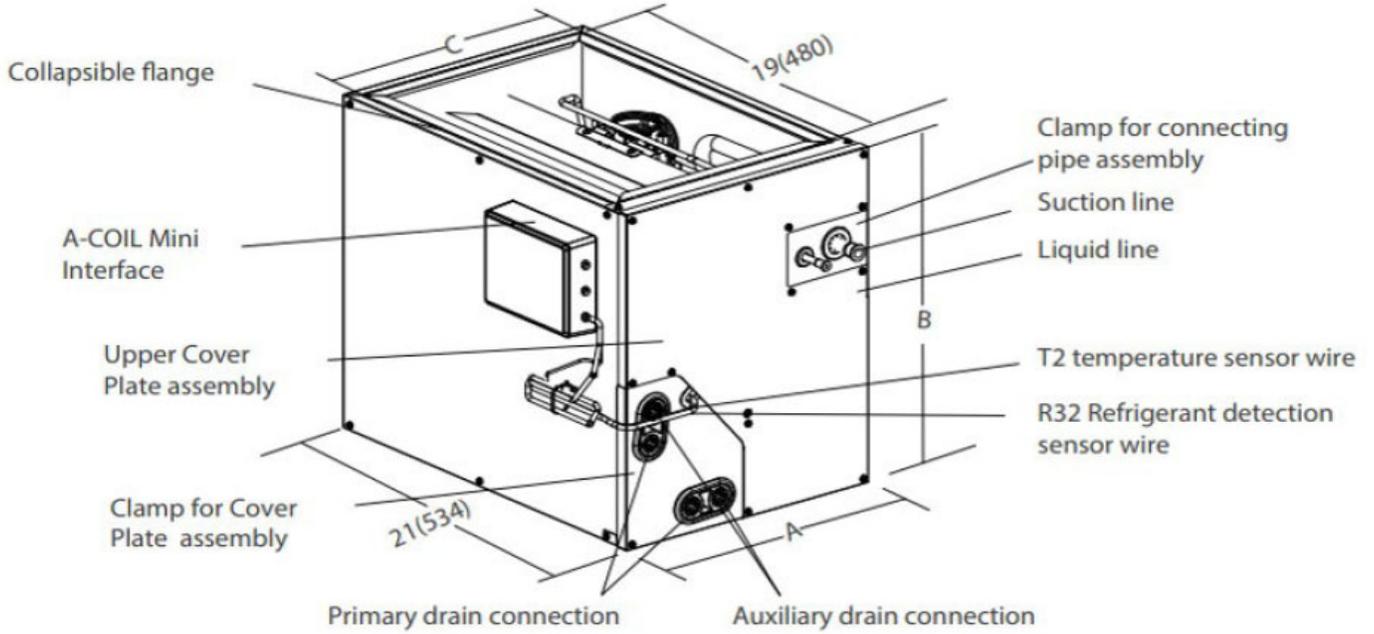

Model	18K/24K A-Coil 17.5"		30K/36K A-Coil 17.5"		30K/36K A-Coil 21"	
Dimensions	inch	mm	inch	mm	inch	mm
A	17-1/2	445	17-1/2	445	21	534
B	18	457	23-1/2	599	23-1/2	599
C	16-2/5	416	16-2/5	416	19-3/4	505
Model	48K/60K A-Coil 21"		48K/60K A-Coil 24.5"			
Dimensions	inch	mm	inch	mm		
A	21	534	24-1/2	622		
B	27-4/5	706	27-4/5	706		
C	19-3/4	505	23-2/5	594		

### OUTDOOR UNIT DIMENSIONS

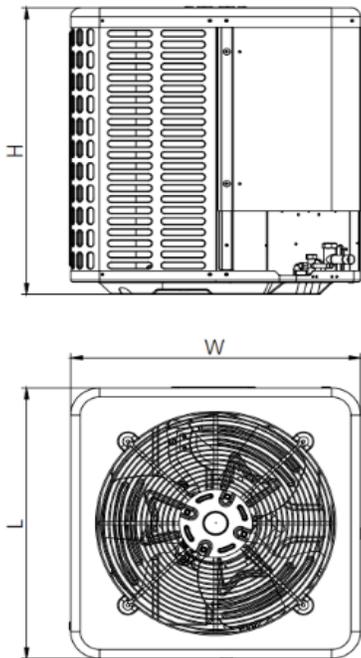

Dimensions		Model	18K/24K		30K/36K		42K/48K/60K	
			inch	mm	inch	mm	inch	mm
W	Model width		23-5/8	600	29-9/64	740	29-9/64	740
L	Model length		23-5/8	600	29-9/64	740	29-9/64	740
H	Model height		25	635	25	635	32-7/8	835
A	Liquid side valve height		2-31/64	63	2-31/64	63	2-31/64	63
B	Distance between two valves		3-1/32	77	3-1/32	77	3-1/32	77
C	Gas side valve height		2-9/32	58	2-9/32	58	2-9/32	58