



Submittal Data Sheet

Indoor Unit Model#: ACiQ-24CC-HH-MC
Outdoor Unit Model#: ACiQ-24ZPL-HP230C
4-Way Ceiling Cassette Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

System Product Code: 810175551449
Indoor Unit Product Code: 810175551142
Outdoor Unit Product Code: 810175550978



INDOOR UNIT SPECIFICATIONS

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		765.2 / 706.3 / 635.7 / 547.4 / NA
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		48.5 / 45.0 / 42.5 / 33.5 / NA
Dimension (W×D×H)	inch	32.68 x 32.68 x 8.07
	mm	830.0 x 830.0 x 205.0
Package (W×D×H)	inch	35.83 x 35.83 x 9.84
	mm	910 x 910 x 250
Net/Gross Weight	lbs	47.18 / 59.08
	kg	21.4 / 26.8

OUTDOOR UNIT SPECIFICATIONS

Compressor Type		ROTARY
Compressor Model		KTM240D46UKT2
Refrigerant		R454B
Refrigerant Oil Charge (mL)		620
Refrigerant Oil		VG74
Outdoor Air Flow (Max) (CFM)		2236.7
Outdoor Noise Level (dBA)		61.5
Dimension (W×D×H)	inch	37.24 x 16.14 x 31.89
	mm	946.0 x 410.0 x 810.0
Package (W×D×H)	inch	42.91 x 19.68 x 34.84
	mm	1090 x 500 x 885
Net/Gross Weight	lbs	130.29 / 141.31
	kg	59.1 / 64.1

EFFICIENCY RATINGS

Cooling		Heating	
SEER2	20.7	HSPF2-4	11.6
EER2	12.0	COP	3.54

COOLING PERFORMANCE

Cooling (Btu/hr)	
Rated Capacity	23400
Min/Max Capacity	12800~26200
Moisture Removal (L/h)	2.36
Standard Operating Range (°F/°C)	-22~122 (-30~50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

HEATING PERFORMANCE

Heating (Btu/hr)	
1. @ 47°F Rated	25000
1. @ 47°F Min/Max Capacity	11500~30700
2. @ 17°F Rated	20400
3. @ 5°F Rated: Capacity / COP	23800 / 2.23
3. @ 5°F Max: Capacity	23800
Standard Operating Range (°F/°C)	-22~75 (-30~24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


ELECTRICAL SPECIFICATIONS

Power Supply	208/230V, 60Hz, 1Ph
System MCA	24.90
Connection Wiring	14#x4
System MOP	25
Compressor RLA	15.0
Outdoor Fan Motor RLA	1.3
Outdoor Fan Motor W	120
Indoor Fan Motor RLA	1.0
Indoor Fan Motor W	45
System Power Input @ Cooling (W)	1950 (960 ~ 2300)
System Power Input @ Heating (W)	2070 (695 ~ 2490)
MCA: Min. circuit amps (A)	MOP: Max. overcurrent protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)



REFRIGERANT PIPING SPECIFICATIONS

Throttle type (Indoor)	N/A
Throttle type (Outdoor)	EXV+Throttle valve
Liquid Size	9.52mm (3/8in)
Gas Size	15.9mm (5/8in)
Max. Piping Length (ft/m)	164.00 (50)
Max. Height Difference (ft/m)	82.00 (25)
Max. Pre-charged Length (ft/m)	24.6 (7.5)
Refrigerant Pre-charged Amount (oz/kg)	63.49 (1.80)
Additional Charge of Refrigerant ((oz/ft)/(g/m))	0.32 (30)
Connection Method	Flared

Indoor Unit Dimensions

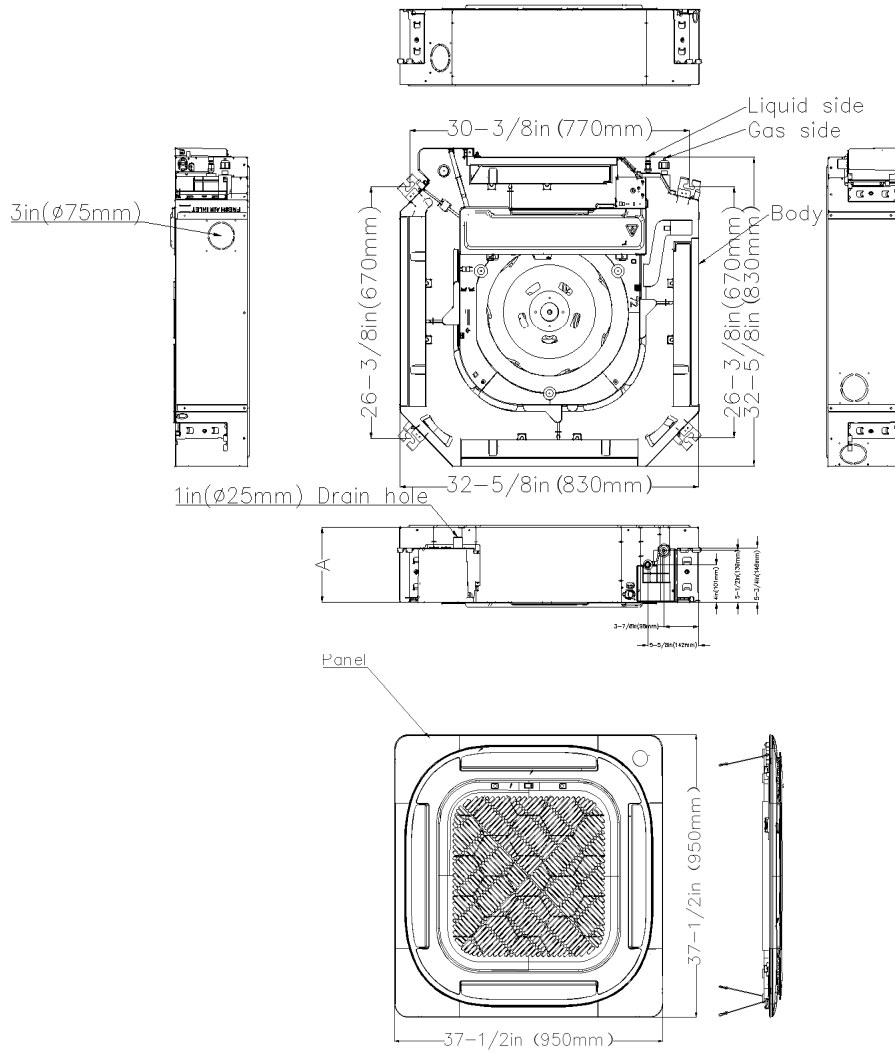


Installation Instructions

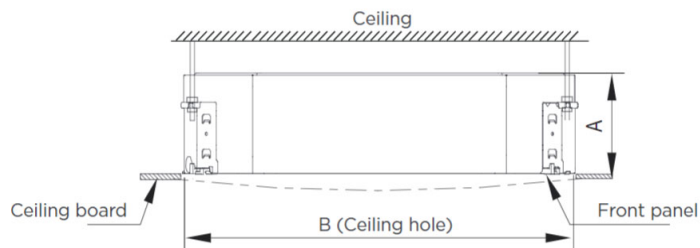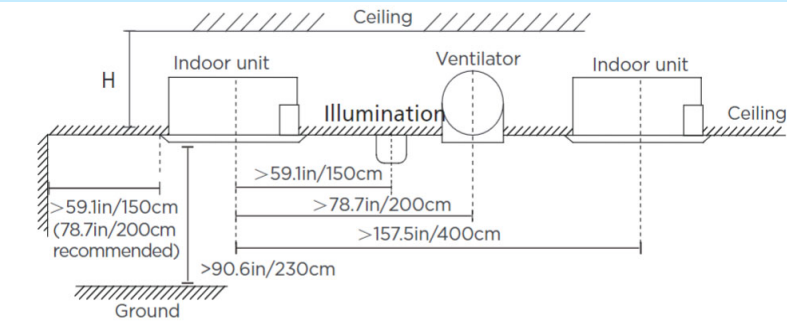


Distance from ceiling relative to height of indoor unit

MODEL	Length of A	Length of H	Length of B
9K/12K/18K	9.6in (245mm)	>10.8 in (275mm)	23.6in (600mm)
24K	8.03in (205mm)	9.06in (230mm)	35.4in (900mm)
36K	9.65in (245mm)	10.7in (271mm)	
48K	11.3in (287mm)	12.3in (313mm)	

Outdoor Unit Dimensions

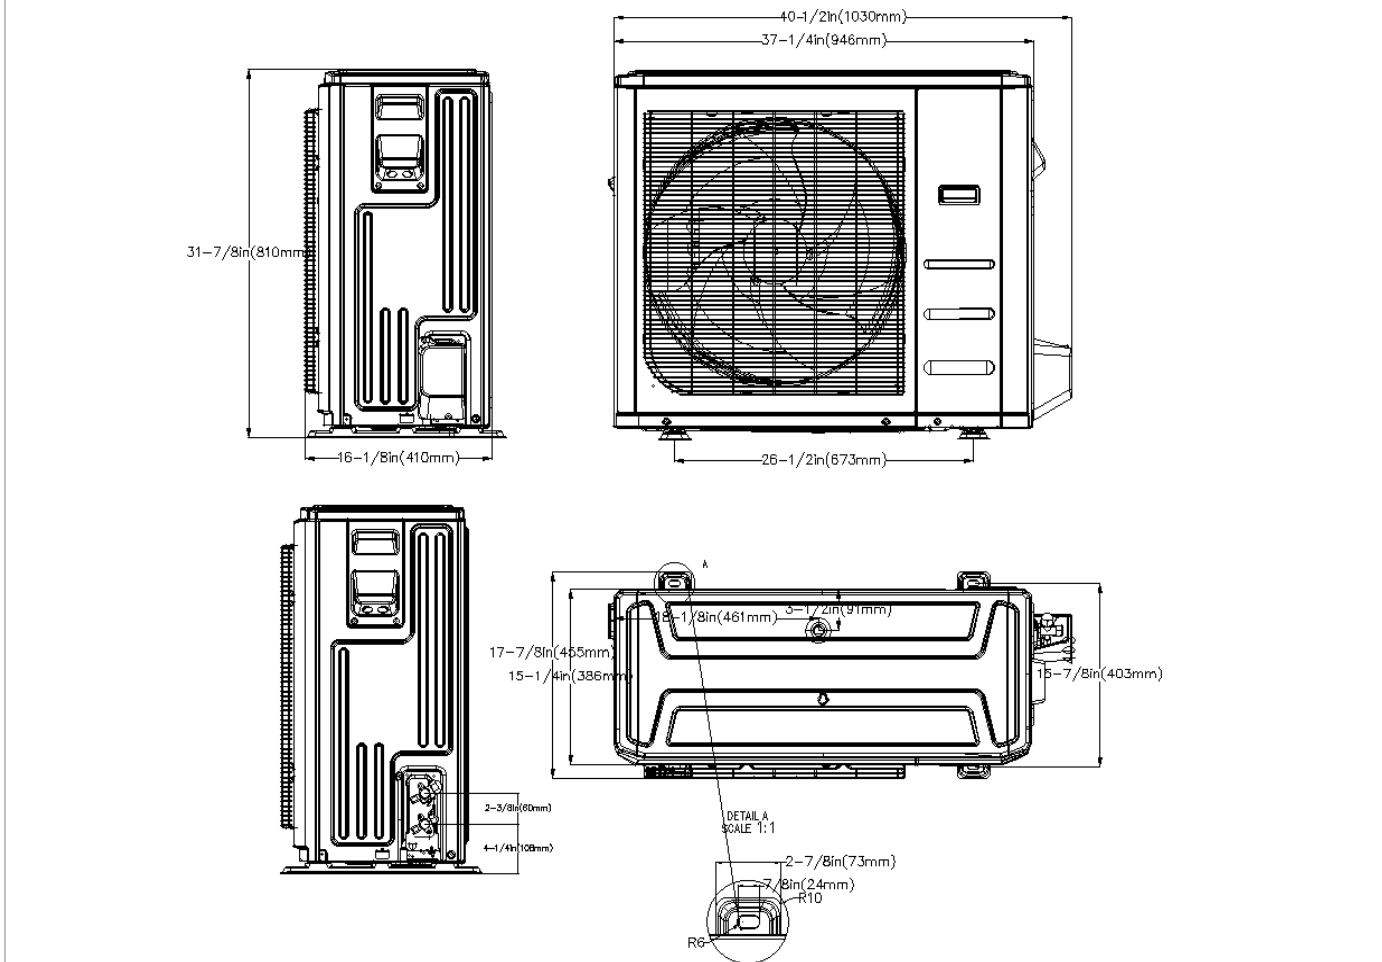

Installation Instructions

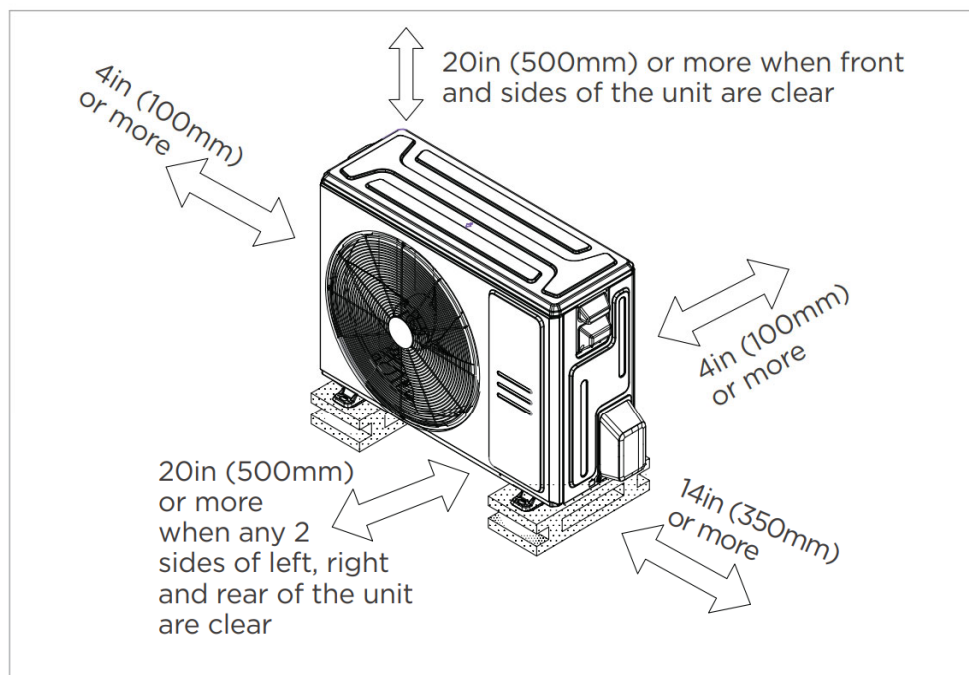

☒ Meets all spatial requirements shown in Installation Clearance Requirements above.

Features

- 360° Air Flow
- Remote on-off and alarm ports
- Refrigerant leakage detection sensor (Optional)
- Humidity sensor
- Built-in pump
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA (by using WiFi dongle)
- 2-pin connector (HA/HB) for programmable wired controller
- Multiple control options available:
 - Two way communication wired controller: 120N (X6)
 - Two way communication wired controller with built-in WiFi: 120N (X6W)
 - Infrared wired controller: 120L
 - Wireless remote controller
 - Third-Party 24V Thermostat*

*24V interface is required.